



683 Series ZIF μ PGA Socket

- Zero Insertion Force with normally closed contacts
- Horizontal and vertical detents allow positive handle locations
- Chamfered lead-in area for easy insertion of IC contacts

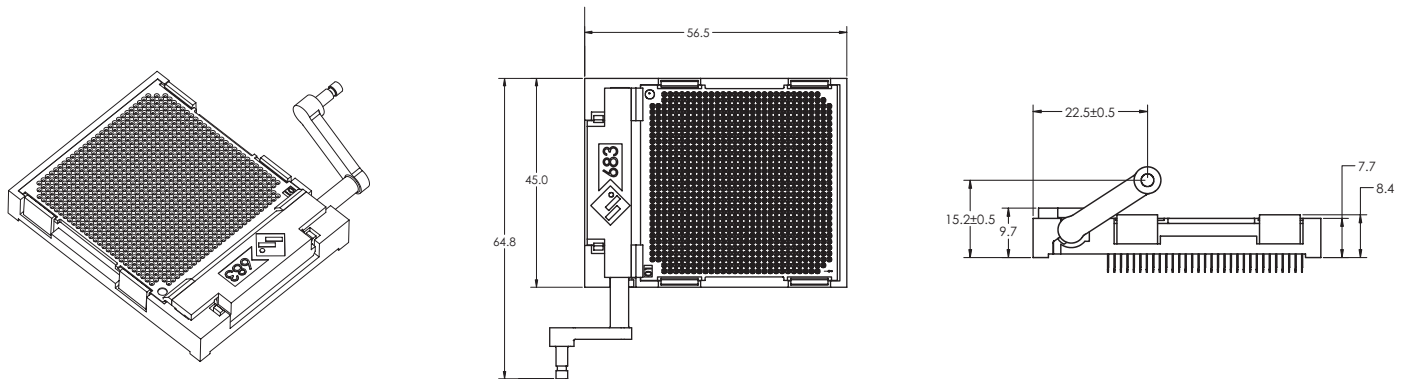

Lead Count	Pitch e (mm)	Package Size (mm)	Matrix	Pin Diameter (mm)	Part Number
754	1.27	40X40	29X29	0.3	683AX75413-02
939	1.27	40X40	31X31	0.3	683AX93913-02
940	1.27	40X40	31X31	0.3	683AX94013-02

DESCRIPTION & ORDERING INFORMATION

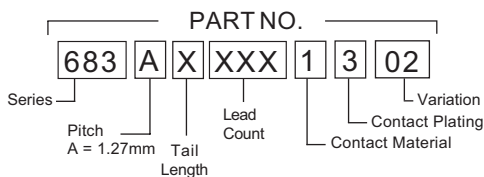

MATERIALS & SPECIFICATIONS

- Socket Body: PEI or Equivalent
- Contact: Beryllium Copper Alloy
- Contact Plating: Gold over Nickel
- Contact Normal Force: 25 grams
- Contact Resistance: 35 m Ω
- Dielectric: 600V AC for 2 minutes
- Current Rating: 1.5 Amps
- Durability: 10,000 cycles min.