

717M and 718M Series Multisite Clamshell CSP/LGA Socket for 0.50mm and 1.00 mm pitch CSP Packages


- Apply up to 4 devices per socket
- Individual pressure pad per device
- Multi-device applications for devices smaller than 6mm x 6mm
- Lower cost per device than single site sockets
- Lower socket investment for your small CSP application
- Maximize throughput and yield



Pitch e (mm)	Lead Count	Package Size (mm)	Matrix	Devices per Socket	Part Number
1.00	5	4.11 x 3.45	3 x 3	4	718M00504B904-A1
	8	3.00 x 3.00	6 x 6	4	718M00803-904-A1
	8	6.10 x 4.32	5 x 3	2	718M00806C904-A1
	12	9.27 x 3.68	7 x 3	2	718M01209E904-A1
	19	6.35 x 4.60	6 x 4	4	718M01906B904-A1
	20	6.43 x 4.57	6 x 4	2	718M02006D904-A1
	20	5.03 x 4.47	5 x 4	4	718M02005D904-A1

Contact your local Sales Representative for implementing your device, or call 800.348.2505.

DESCRIPTION & ORDERING INFORMATION

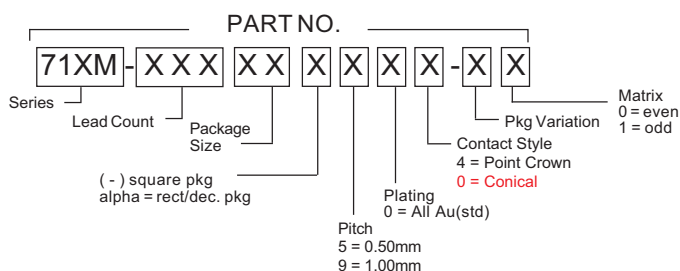

MATERIALS & SPECIFICATIONS

- Socket Body: PEI, PES, or Equivalent
- Contact: Beryllium Copper Alloy
- Contact Plating: Gold over Nickel
- Contact Normal Force: 12-15 grams typical
- Contact Resistance: 350 mΩ typical
- Temperature Rating: Burn-in @ 125°C
- Durability: 10,000 cycles min.